


TRITORC

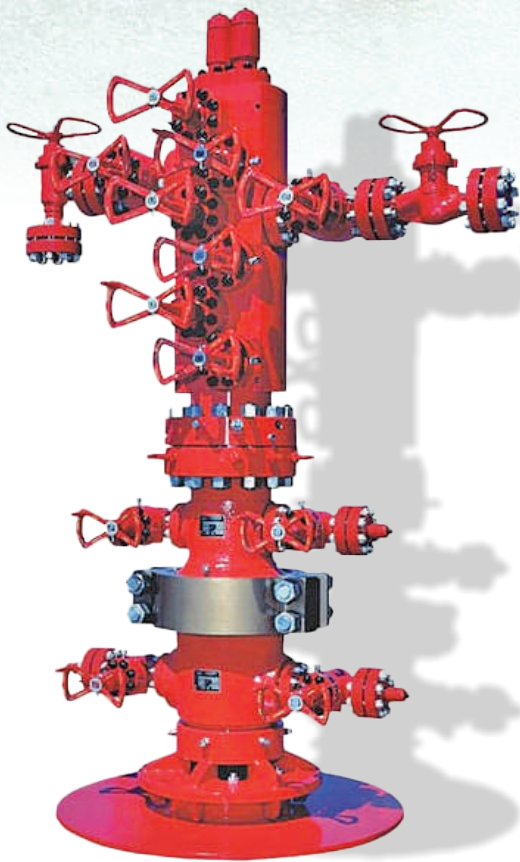

LOW PROFILE HYDRAULIC TORQUE WRENCH (ULTRA SLIM)

TRITORC offers a series of Low Profile Torque Wrenches which are crucial for applications in constricted spaces like Christmas Tree on BOP.


The reduced dimensions allow the tool to fit into tight spaces easily.

The hydraulic hose connector/coupler swivels in an arc of 180° x 360° allowing access for hydraulic hoses from all practical directions, this allows operations even in confined spaces.

A High Performance Steel Alloy used for several components including the Housing. This keeps the tool light, compact and strong.



LOW PROFILE HYDRAULIC TORQUE WRENCHES

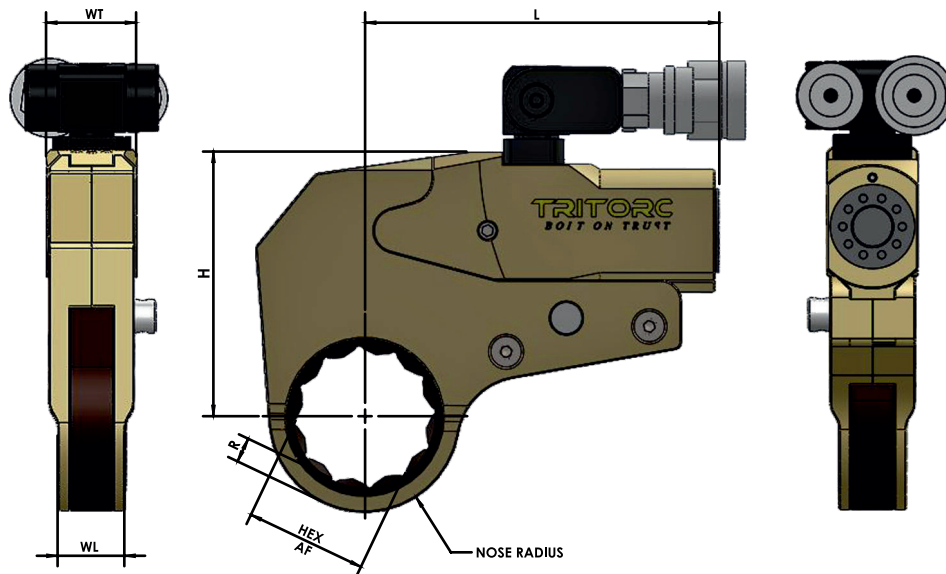

Power Head		Torque Range		Hex Size mm (inch)	L mm (inch)	H mm (inch)	WL mm (inch)	WT mm (inch)	Radius (Nose Width)
		Min	Max						
THL-2	Ft.Lbs Nm	214 293	2217 3051	36.51 (1-7/16)	135 (5.31)	101 (3.97)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				31.75 (1-1/4)	135 (5.31)	101 (3.97)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				46.03 (1-13/16)	135 (5.31)	101 (3.97)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				41.28 (1-5/8)	135 (5.31)	135 (5.31)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				50.8 (2)	139 (5.47)	104 (4.09)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				55.58 (2-3/16)	137 (5.39)	110 (4.33)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
				60.33 (2-3/8)	137 (5.39)	111 (4.37)	25.5 (1.00)	34.4 (1.35)	8.9 (0.35)
THL-4	Ft.Lbs Nm	443 608	4891 6733	65.1 (2-9/16)	174 (6.85)	142 (5.59)	28.7 (1.13)	49.5 (1.95)	11.5 (0.45)
				69.85 (2-3/4)	176 (6.93)	142 (5.59)	28.7 (1.13)	49.5 (1.95)	11.5 (0.45)
				74.63 (2-15/16)	176 (6.93)	142 (5.59)	28.7 (1.13)	49.5 (1.95)	11.5 (0.45)
THL-8	Ft.Lbs Nm	867 1192	9323 12834	53.98 (2-1/8)	216 (8.50)	154 (6.06)	38 (1.49)	61.5 (2.42)	13.35 (0.53)
				79.38 (3-1/8)	216 (8.50)	154 (6.06)	38 (1.49)	61.5 (2.42)	14.45 (0.57)

Note: For Higher Torque Values we can provide you with Customized Solutions.



TRITORC EQUIPMENTS PVT. LTD.

USA | UAE | OMAN | QATAR | KSA | KUWAIT | INDIA | AFRICA

+91 22 4126 6025

enquiry@tritorc.com

www.tritorc.com