


HYDRAULIC TORQUE WRENCH PUMP

- Compact three stage pump
- The Single valve block can be replaced by component FP-4. thereby allowing 2 or 4 Tools to be driven simultaneously
- Three stage induction motor driven so brushless
- Oil cooler, supporting continuous operation with steel frame
- 4" diameter gauge, aluminium oil tank with oil level indicator
- Variable pressure adjustment between 1000-10000 Psi
- Designed for continuous operation



Model	HPL - 101	HPL - 101/4
Working Pressure	10000 Psi	10000 Psi
Drive	Electric	Electric
Voltage	220V/50Hz	220V/50Hz
Power	1.1 KW	1.1 KW
Tank Capacity	5.5 L	5.5 L
Flow Rate (Low - Mid - High)	7 - 1.6 - 0.8 L/min	7 - 1.6 - 0.8 L/min
Oil Cooler	Yes	Yes
Weight	25 kg	28 kg
Oil Outputs	4x1/4" NPT	8x1/4" NPT
LxWxH	445x304x426mm	461x304x426mm

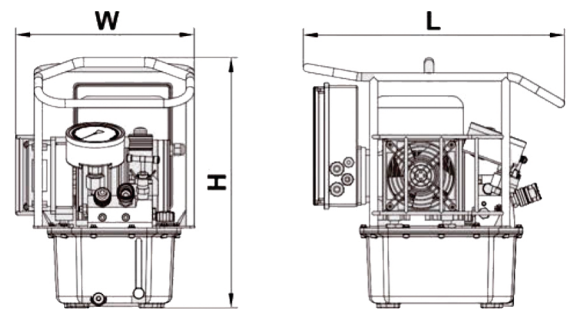

Pneumatic Pump



- Compact three stage pump
- The Single valve block can be replaced by component FP-4. thereby allowing 2 or 4 Tools to be driven simultaneously
- Three stage with air drive
- Supporting continuous operation with steel frame
- 4" diameter gauge, aluminium oil tank with oil level indicator
- Variable pressure adjustment between 1000-10000 Psi
- Designed for continuous operation

Model	APL - 100	APL - 100/4
Working Pressure	10000 Psi	10000 Psi
Drive	Air	Air
Air Pressure(Input)	4-8 bar	4-8 bar
Power	4.0 HP	4.0 HP
Tank Capacity	5.5 L	5.5 L
Flow Rate (Low - Mid - High)	8.6 - 2.2 - 1.1 L/min	8.6 - 2.2 - 1.1 L/min
Oil Cooler	N/A	N/A
Weight	22 kg	24 kg
Oil Outputs	4x1/4" NPT	8x1/4" NPT
LxWxH	442x282x337mm	460x282x377mm

