

Specification	
Available Sizes	4" NB to 52" NB ANSI 150 TO ANSI 1500
Sealing Length	Variable as per customer's requirement
Type of Clamps	Bolted split pipe repair clamps & Pin Hole Type
Welding	Submerged Arc Welding (SAW) Automatic Welding
Body Shell	ASTM SA-516-70 or SA-350 / SA-694
Stiffeners (Side Bars)	ASTM SA-105 or Equivalent Standards
Sealant	Buna-Nitrile, Neoprene or Vitor Seals
Studs & Nuts	ASTM-SA-193B7M / ASTM SA-194-2HM, PTFE Coated
Design & Hydrotested	ASME Sev VIII / Div I
Testing	On Rigs up to 52" NB Custom-Fabricated One Piece Testing Rig Covering Line Size 16" to 40" Available in-house

Efficient Solutions for Effective Pigging

LEAK REPAIR CLAMPS

As per TPI-6H under Monogram License No. 6H-0012 & NACE-MR-0175

LEAK REPAIR CLAMPS

As per TPI-6H under Monogram License No. 6H-0012 & NACE-MR-0175



High Pressure Class 1500 / 2500 for Oil & Gas Flow

LEAK REPAIR CLAMPS




LEAK REPAIR CLAMPS



24" X 12" TEE CLAMP INSTALLED



24" #600 IJ CLAMP UNDER INSTALLED AT GAIL

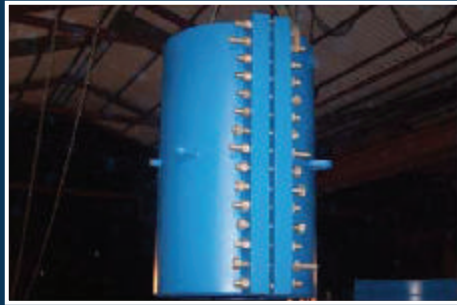

24" X 12" TEE CLAMP INSTALLED



20" EPOXY CLAMP UNDER INSTALLATION



PIN HOLE CLAMP



20" NB BEND CLAMP

LEAK REPAIR CLAMP INSTALLED AT SITE

